

SANDVIK RH510 5"


COMPLETE HAMMER

3 1/2" API reg. pin top sub (S & T -version)

BG00844819

WEIGHT		OUTSIDE DIAMETER		HAMMER LENGTH		HAMMER LENGTH WITH BIT			
kg	lb	mm	inch	mm	inch	Bit closed		Bit extended	
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
68	145	120	4.72	987	38.86	1082	42.6	1122	44.2

AIR CONSUMPTION, CFM			AIR CONSUMPTION, M ³ /MIN			
150 psi	250 psi	350 psi	10 bar	18 bar	24 bar	
305	580	855	8.64	16.42	24.21	
Low volume option	285	540	790	8.07	15.25	22.37

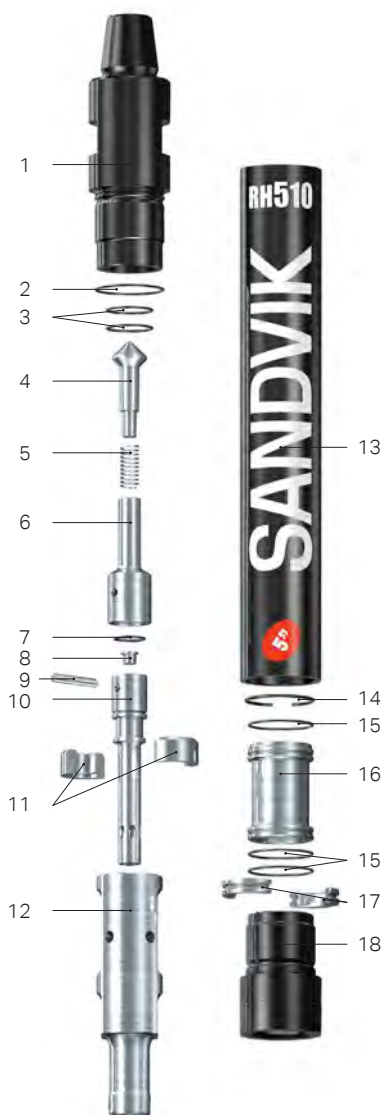

REPLACEMENT PARTS ITEM DESCRIPTION	Weight, kg	Weight, lb	Part No.
1. Top subs with 3 O-rings			
3 1/2" API reg. pin	10	22	33-58S01-04A
2. O-ring top sub OD			In seal kit
3. O-ring top sub ID			In seal kit
4. Check valve dart (with spring)	0.3	0.66	25-99002A
5. Check valve spring	0.02	0.04	BG00348123
6. Check valve guide	0.3	0.66	39-58S01
7. O-ring feed tube			In seal kit
8. Choke set, blank 1/8", 3/16", & 1/4"	0.12	0.26	29-68017A
9. Feed tube retainer pin	0.09	0.2	12-99018
10. Feed tube with retainer pin and blank choke	1	2.2	37-58001A
11. Tuning ring for low volume (optional)	0.03	0.07	56-58552
12. Piston	12	26.4	BG00387748
13. Piston case with retainer ring	27	59.4	BG00844084
14. Piston retainer ring	0.05	0.11	23-99032
15. O-rings guide sleeve & bit ret.			In seal kit
16. Guide sleeve with 2 O-rings	3	6.6	26-58J10A
17. Bit retainer ring with O-ring	0.5	1.1	27-58006A
18. Driver sub	6	13.2	BG00844294
Seal kit			
1 piece of #2, 2 of #3, 1 of #7 & 3 of #15	0.45	0.99	38-58D56
Rebuild kit			
1 piece of #1, 1 of #13, 1 of #18 & seal kit			
3 1/2" API reg. pin	43	94.6	BG00844879
Bit shank			
M50			



Sandvik Mining and Rock Technology reserves the right to make changes to the information on this data sheet without prior notification to users. Please contact a Sandvik representative for clarification on specifications and options.